




Air filters for pressure operation VCFT series

The Induvac suction filters are available in capacities from 36 m³/hr up to 1350 m³/hr and can be used for side channel blowers in pressure operation. The filters are recognized by its famous black housing and are standard supplied with a paper element. But these elements can also be made of polyester or stainless steel in different filtration grades. The housings are 100% interchangeable with the one of the standard brands. Filters can be delivered with connections starting from 3/8" up to 4" with BSP and NPT thread. The standard steel construction is equipped with a special coating to guarantee a long life time.



Induvac Ref.	Capacity m ³ /hr	Cartridge type	R "G	A mm	B mm	C mm
VCF.T4005	36	TGA 8056	3/4"	95	83	40
VCF.T4006	84	TGA 8032	1"	130	90	60
VCF.T4007	96	TGA 8032	1" 1/4	130	90	60
VCF.T4008	210	TGA 8053	1"1/2	130	115	80
VCF.T4009	270	TGA 8051	2"	160	135	80
VCF.T4010	480	TGA 8061	2"1/2	180	135	80
VCF.T4011	900	TGA 8063	3"	280	135	80
VCF.T4012	1350	TGA 8068	4"	320	210	115

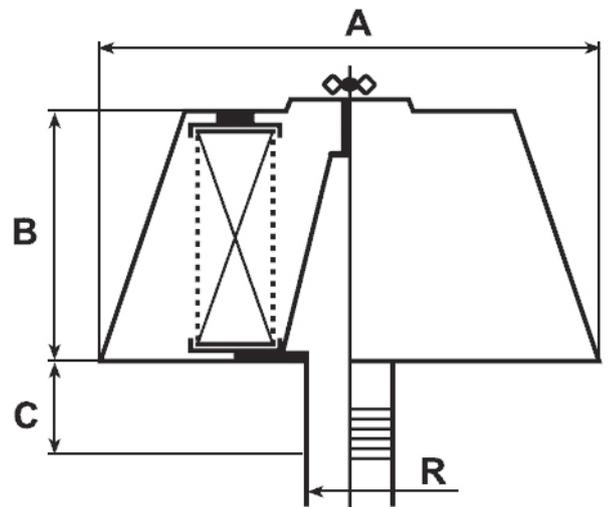

No rights can be derived from the sketches, dimensions and contents of this data sheet. The data is for information purposes only. Induvac reserves the right to change or modify the data. No complaints can be made about this.