



Induvac BV
 Postbus 689
 2700 AR Zoetermeer
 info@induvac.com
 www.induvac.com

SF SERIE


Regel Afsluiter



Industriële ventilatoren

Type	ø A	ø D ₁	ø D ₂	E	N° x	ø d
SF 100	80	109	120	200	3	7
SF 110	100	136	150	200	6	7
SF 120	125	155	170	200	6	7
SF 130	150	175	190	200	6	7
SF 140	150	182	210	200	8	11
SF 150	160	200	215	200	6	7
SF 160	160	200	225	200	8	11
SF 170	180	220	242	200	6	7
SF 180	180	219	245	200	8	11
SF 190	200	241	285	230	8	11
SF 200	224	265	290	250	8	11
SF 210	250	292	320	280	8	11
SF 220	280	332	365	310	8	11
SF 230	315	366	400	350	8	11
SF 240	355	405	440	380	8	11
SF 250	400	448	485	430	8 / 12 *	11
SF 260	450	497	535	480	8 / 12 *	11
SF 270	500	551	585	530	12 / 16 *	11
SF 280	560	629	685	590	16	11

Afmetingen zijn in mm

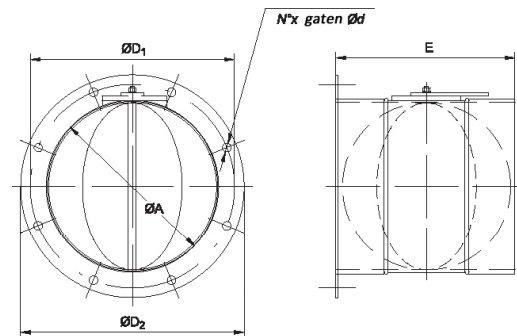

De U/AR en U/CB zijn uitgerust met 8 of 16 gaten, terwijl de U/PB, U/PBM en U/HPH serie zijn uitgerust met 12 gaten.

Accessoires zijn van toepassing op:

Type	U/HC	U/AR	U/ARP	U/AP	U/RF	U/TM	U/CB	U/PB	U/PBM	U/MPR	U/APE	U/APR	U/APF	U/HPG	U/HPH
SF 100	100														
SF 110	120			200											
SF 120	140														
SF 130	150 160			150 250 280 300	250										
SF 140											350 400 450 500				
SF 150	180			350	300										
SF 160											560 630 710 800		500		
SF 170	200			400	350 402										
SF 180						250		250		350	900	400	560		
SF 190		200	200		403				250	400		450 500 560	630	500	
SF 200						310		310		450		630	710	560	
SF 210		250	250			350		350	310	500			800	630	
SF 220		300	300			400		400	350	560		710	900	710	560
SF 230						450		450	400	630				800	630
SF 240		350					350	500	450					900	710
SF 250		400					400	560	500						800
SF 260		450					450	630	560						
SF 270		500					500	710	630						800
SF 280							580	800	710						

